




### CLASS C

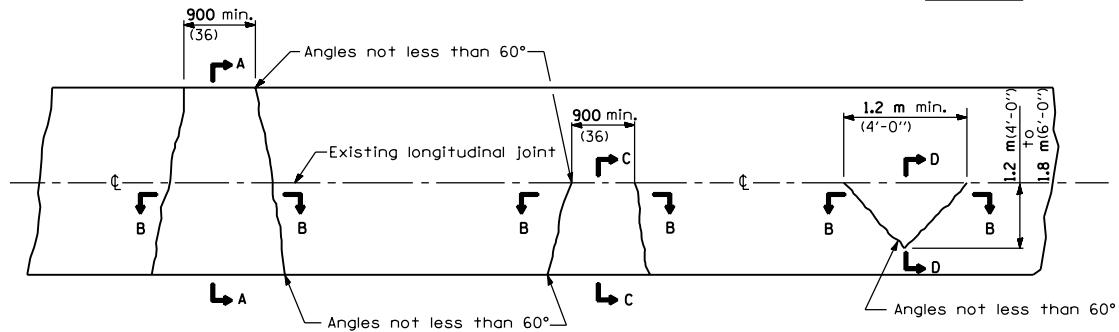


Longitudinal joint -  
sawed (one operation) or  
formed (two operations)



### SECTION A-A



### SECTION D-D

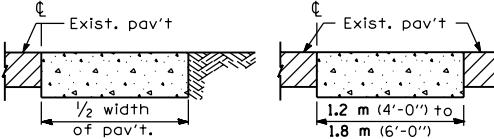


### DETAIL OF SAWED CONTRACTION JOINT

#### NOTE

Longitudinal joints shall be as detailed on Standard 420001 except that tie bars are not required for patches less than 6.0 m (20'-0") in length.





### CLASS D

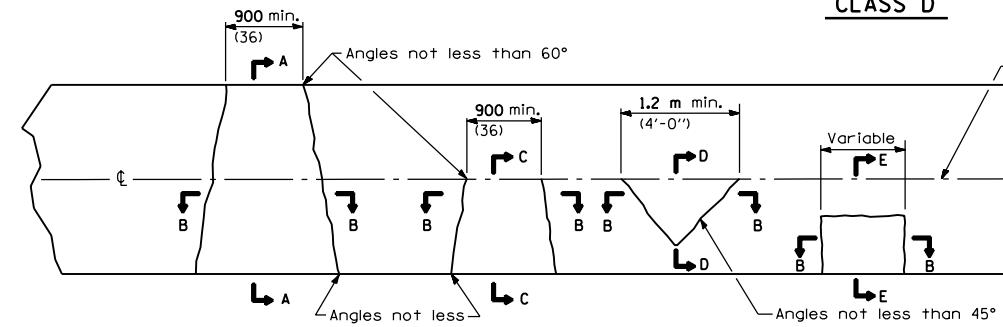


Existing longitudinal joint

Variable


Variable



### SECTION A-A (Built in two operations)

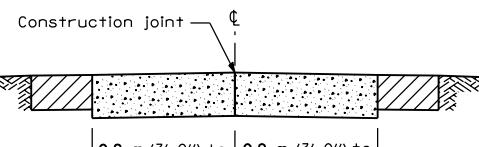

(Built in two operations)

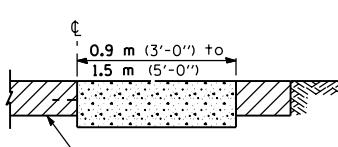

#### GENERAL NOTES

Existing tie bars shall be either cut or removed. Marginal bars shall be cut.

All dimensions are in millimeters (inches) unless otherwise shown.

### CLASS C and D PATCHES

### STANDARD 442201-01

Illinois Department of Transportation	1-1-99
PASSED January 1, 1999	
Charles Kellher	
ENGINEER OF POLICY AND PROCEDURES	

1-1-99  
1-1-99  
APPROVED January 1, 1999  
Bill Hunter  
ENGINEER OF DESIGN AND ENVIRONMENT